


**HYGROMATIK**  
WE HUMIDIFY THE AIR

# MultiLance

Steam manifold system for extreme short absorption distances

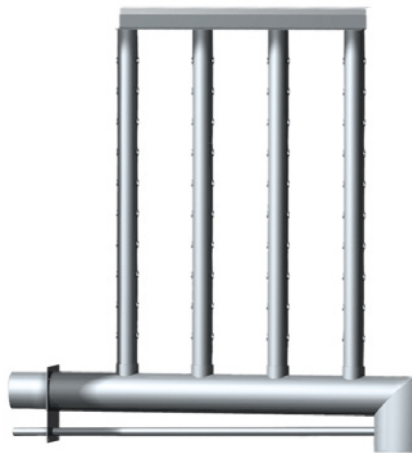

The HygroMatik MultiLance steam manifold systems are designed for use with extremely short absorption distances and are suitable for **electrode and heater element steam humidifiers**, as well as for **steam injection systems**. They can also be used with high flow velocities of up to 8 m/s in air ducts.

The MultiLance systems can be installed vertically as well as horizontally in duct widths of 450 mm or above.


**HYGROMATIK**  
MORE THAN  
**45 YEARS**  
HUMIDIFICATION




Humidification for best conditions

# Flexible configuration for every demand.

The speciality of the systems is that they can be individually assembled and completely dismantled. Therefore they can be individually adapted to the desired device geometry with maximum flexibility by HygroMatik. This also applies for special installation situations, both in front of and behind obstacles.

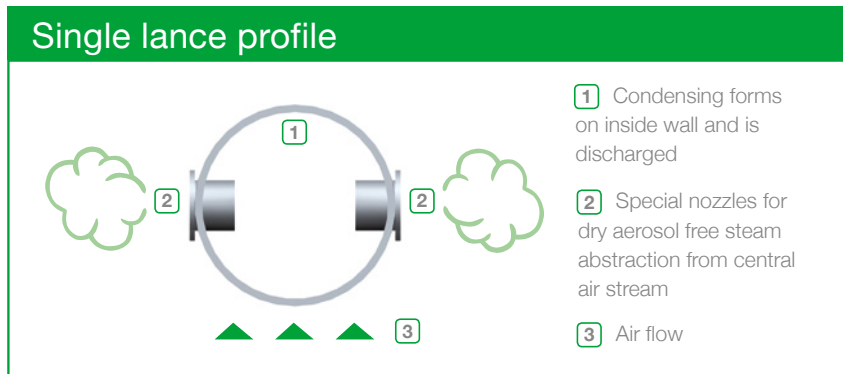

MultiLance systems are simple to install, maintenance-free and the high quality stainless steel components afford a long lifetime. Thanks to the special nozzle format the steam is obtained without aerosols from the middle of the lance, so that the downstream sensitive duct installations can be effectively protected from condensation.

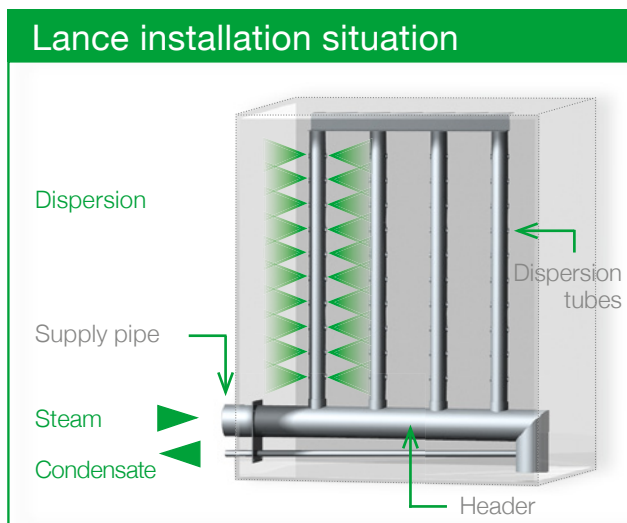

### Design capacity chart

Components	Cross-section [mm]	Steam output [kg/h]
Supply pipe	25	≤ 18
	40	18 ≤ 40
Header	40	≤ 45
	50	46 ≤ 115
Dispersion tubes	76	116 ≤ 225
	25	≤ 4
	40	4 ≤ 16
	50	16 ≤ 32

**HYGROMATIK**  
WE HUMIDIFY THE AIR

**AIRTREND Limited**  
Predstavništvo u Beogradu  
Kumanovska 14, 11000 Beograd  
Tel: 011 383 68 86, 308 57 40  
Faks: 011 344 41 13  
e-mail: [gobrid@eunet.rs](mailto:gobrid@eunet.rs)  
web: [www.airtrend.rs](http://www.airtrend.rs)

